


DH-C55 Rating

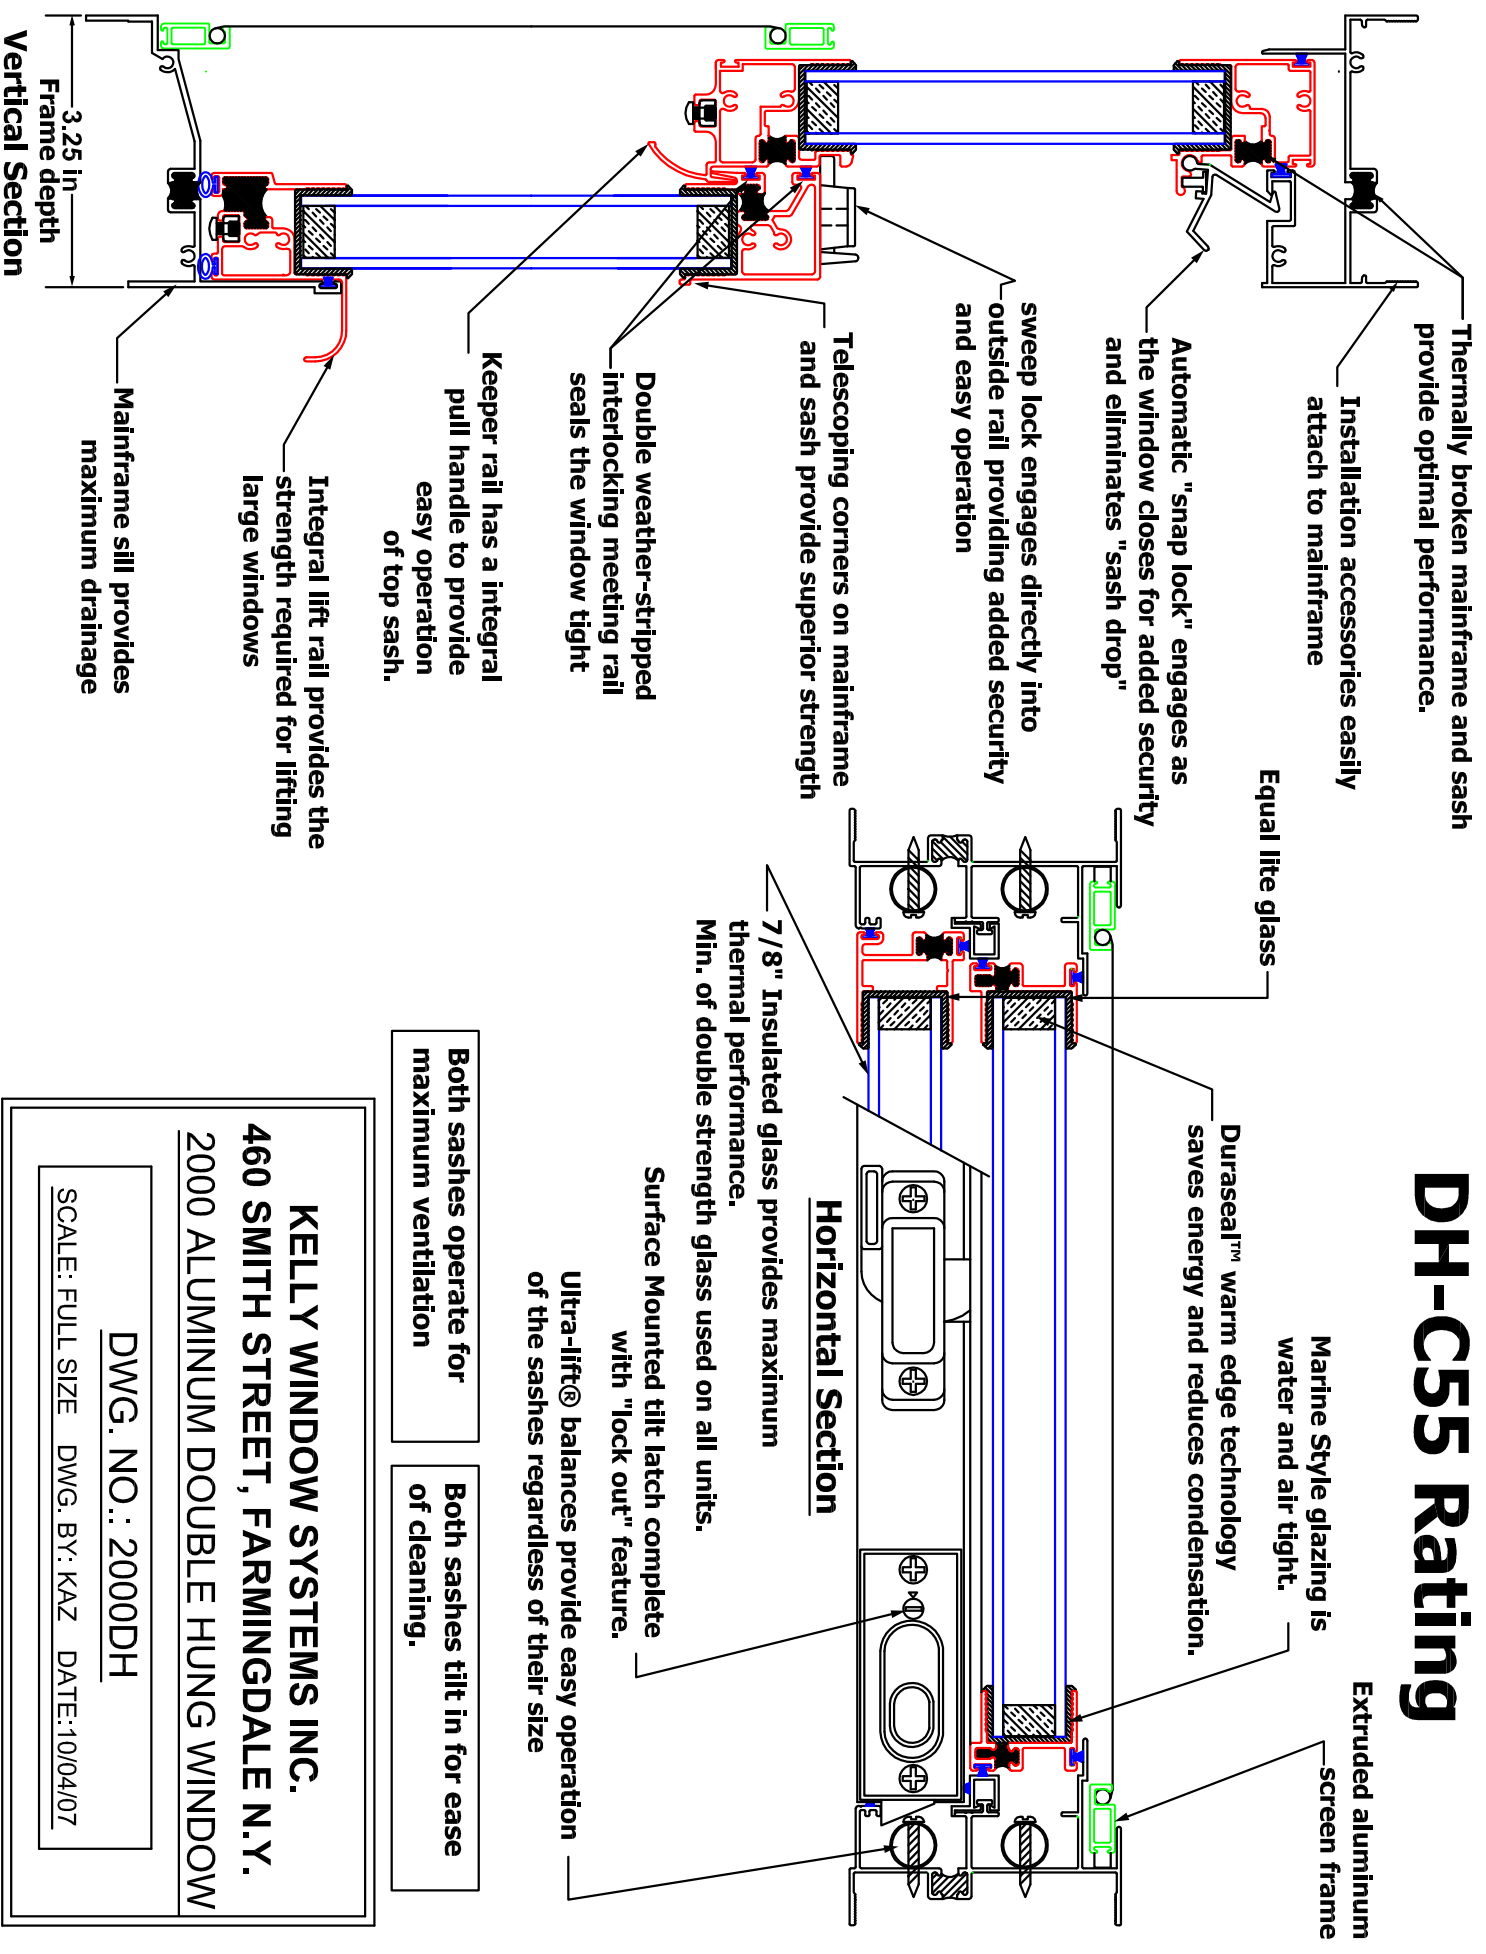

Thermally broken mainframe and sash provide optimal performance.

Installation accessories easily attach to mainframe

Equal lite glass

Duraseal™ warm edge technology saves energy and reduces condensation.

Marine Style glazing is water and air tight.

Extruded aluminum screen frame

Automatic "snap lock" engages as the window closes for added security and eliminates "sash drop"

Sweep lock engages directly into outside rail providing added security and easy operation

Telescoping corners on mainframe and sash provide superior strength

7/8" Insulated glass provides maximum thermal performance. Min. of double strength glass used on all units.

Horizontal Section

Surface Mounted tilt latch complete with "lock out" feature. Ultra-lift® balances provide easy operation of the sashes regardless of their size

Double weather-stripped interlocking meeting rail seals the window tight

Keeper rail has an integral pull handle to provide easy operation of top sash.

Integral lift rail provides the strength required for lifting large windows

3.25 in Frame depth

Vertical Section

Both sashes operate for maximum ventilation

Both sashes tilt in for ease of cleaning.

KELLY WINDOW SYSTEMS INC.
460 SMITH STREET, FARMINGDALE N.Y.
2000 ALUMINUM DOUBLE HUNG WINDOW

DWG. NO.: 2000DH

SCALE: FULL SIZE DWG. BY: KAZ DATE: 10/04/07