


Thermally Broken Mainframe and Sash provide optimal Performance

Installation accessories easily attach to mainframe.

Extruded Aluminum Screen Frame

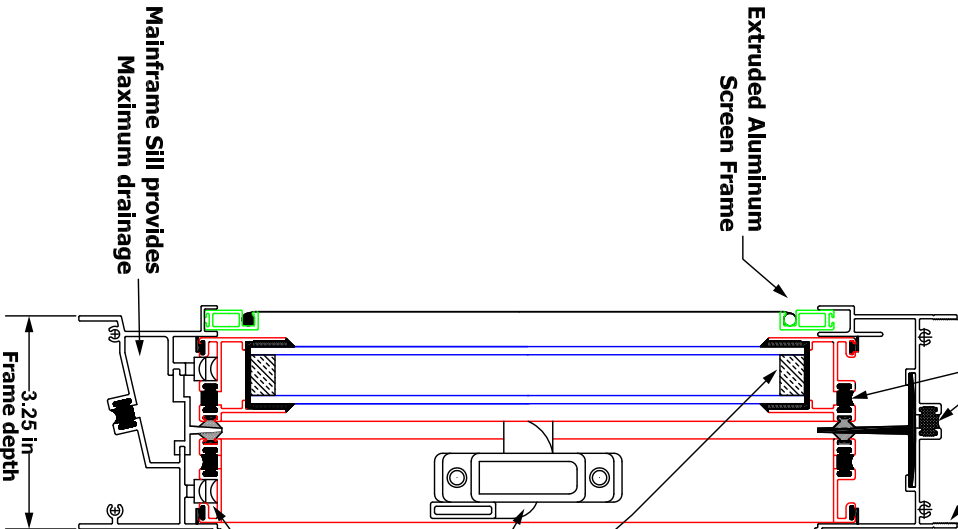

3.25 in  
Frame depth

Mainframe Sill provides Maximum drainage

Telescoping corners on Mainframe and Sash provide added strength.

BRASS ROLLERS provides ease of operation and longevity.

SWEEP LOCK provides Added Security

Duraseal™ Warm Edge Technology saves energy and reduces condensation.

Marine Style Glazing is Water and Air tight.

7/8" Insulated Glass provides Maximum Thermal Performance

Double weather-stipped Interlocking meeting rail.

SWEEP LOCK engages directly into outside sash rail.


Automatic "Snap Lock" engages as the window closes providing a "Triple lock system".

Both sashes operate back and forth providing maximum ventilation

Both sashes are removable from the interior for ease of maintenance.

# HS-C45 RATING

## HORIZONTAL SECTION

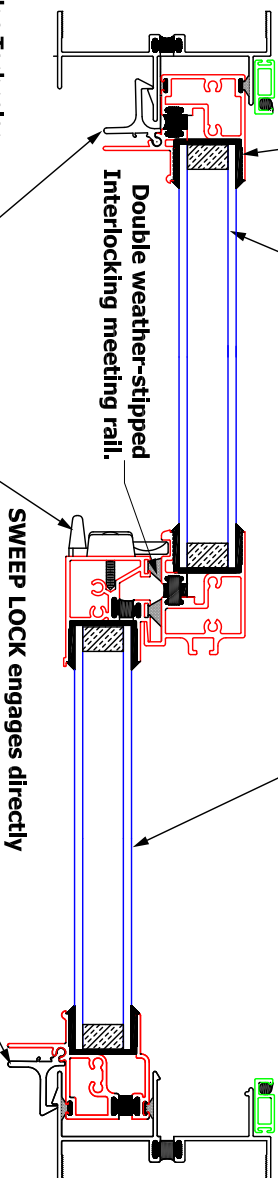

## VERTICAL SECTION

KELLY WINDOW SYSTEMS INC.  
460 SMITH STREET, FARMINGDALE N.Y.  
2725 ALUMINUM SLIDING WINDOW  
DWG. NO.: 2725slider

SCALE: FULL SIZE DWG. BY: KAZ DATE: 07/26/07